TECHCON™

Smart Valves Controller TS550R

The TS550R is a Smart controller capable of controlling all Techcon pneumatic valve series including: TS1212 pinch tube valve, TS941/TS5322 Spool valve, TS5420/TS5440 Needle valve and TS5620/TS5622 Diaphragm valve. With a universal power supply, it is a fully 'plug and play' system and can be used immediately, anywhere in the world.

The TS550R Smart valve controller features an intuitive touch screen interface for easy setup and operation. Dispensing parameters can be precisely configured directly on the touch screen or remotely through the networking options.
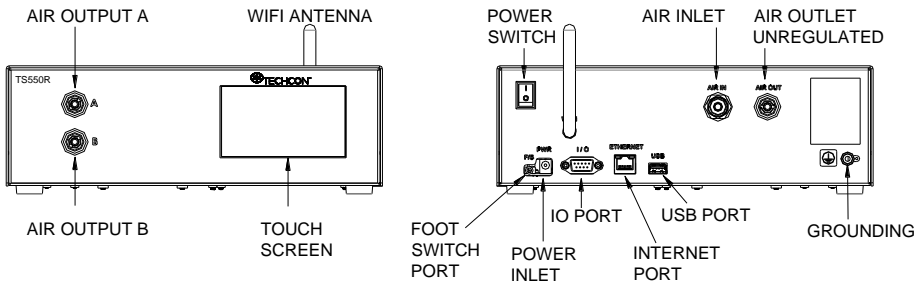
First in its class, the TS550R is equipped with Ethernet and WiFi interfaces that allow users to configure the exact parameters and monitor and control the process from anywhere in the world. This feature complies with Smart Factory requirements of Industry 4.0.

Additional advance features include digital timer to provide accurate and repeatable dispense time, and digital pressure regulator with dual-unit display to allow precise pressure control.
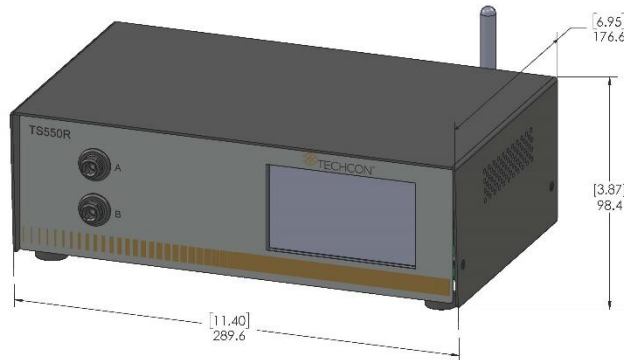
The friendly user interface provides an option to program up to 50 varied, sequenced or individual shots. These systems have a user programmable "purge," "timed" dispense cycle settings and a "teach mode" for determining the dispensing time.

Integration into semi-automatic and automatic machinery is made easy with the I/O interface connector that can be used to initiate and stop the dispense cycle with feedback to the host machine for the next cycle. A low-pressure warning feature is also included to help maintain uninterrupted dispensing.

IDENTIFICATION OF FEATURES

AIR OUTPUT A | WIFI ANTENNA | POWER SWITCH | AIR INLET | AIR OUTLET UNREGULATED

TS550R A B

AIR OUTPUT B | TOUCH SCREEN | FOOT SWITCH PORT | POWER INLET | IO PORT | INTERNET PORT | USB PORT | GROUNDING

Key Features & Benefits

- Touch Screen interface for easy setup and operation
- Industry 4.0 for "Smart Factory" integration
- Universal power supply for worldwide use
- Digital pressure regulator for precise control

SPECIFICATIONS & PART NUMBERS

6.95 / 176.6

[3.87] / 98.4

[11.40] / 289.6

Part Number:	**TS550R**
Size (Imperial):	11.4' W x 8.3" L x 3.9" H
Size (Metric):	290mm x 211mm x 99mm
Weight:	6.8 lb (3100g)
Pressure Range:	0 to 100psi (0-6.9 bar)
Display:	Touch Screen
Timing Range:	0.008 – 99.9 seconds
Timing Tolerance:	+/- 0.001%
Input Voltage:	100 – 240 VAC
Cycle Rate:	900/min.
Cycle Modes:	Timed, Interrupt, Teach, Purge
Connectivity:	Ethernet, WIFI
Certification:	CE, TUV-GS

The controller is shipped with the following items:

- Universal power supply • Foot switch • Air hose • Air filter

ACCESSORIES

- Fluid reservoirs: The controller can be used in combination with the TS1254 or TS1258 Pressure Tank

- Dispensing Tips: Suitable for use with all tip series. For the complete dispensing tip offering please visit www.techcon.com

Typical Applications

- Control Diaphragm for bonding application
- Control Mini Spool valve for form-in-place gasket
- Control Needle valve for precision filling process

For Sales & Support

Techcon Corporate Headquarters
10800 Valley View Street
Cypress, CA   90630, USA
Tel: 1-714-230-2398
E-mail: oemorders@okinternational.com

Techcon European Corporate Office
Eagle Close, Chandler's Ford Industrial Estate, Eastleigh, Hampshire, SO53 4NF, UK.
Tel: +44 2380 489 100
E-mail: europe-orders@okinternational.com

Or visit www.techcon.com